

Type 1 Required

MODIFICATION INSTRUCTIONS

for Service Codes: 3434 and 3425

Kodak X-Omat 3000 RA PROCESSOR

Mod No. 1

Kodak X-Omat 5000 RA PROCESSOR

Mod No. 3

To help prevent the possibility of film jams in the FIXER/WASH CROSSOVER, due to swelling of the ROLLER, and to install the latest version of software.



Important

Use qualified service personnel to install this modification.

Service Effects:	None.
Special Requirements:	None.
Serial Numbers:	3000 RA: 0 - 3580 5000 RA: 0 - 756
Special Tools:	PORTABLE COMPUTER INTERFACE CABLE TL-4391
Installation Time:	Approximately 0.5 hours
Parts Status:	Available from Service Parts Management
Parts Requirements:	See the Parts List on Page 2.



HEALTH IMAGING

PLEASE NOTE The information contained herein is based on the experience and knowledge relating to the subject matter gained by Eastman Kodak Company prior to publication.

No patent license is granted by this information.

Eastman Kodak Company reserves the right to change this information without notice, and makes no warranty, express or implied, with respect to this information. Kodak shall not be liable for any loss or damage, including consequential or special damages, resulting from any use of this information, even if loss or damage is caused by Kodak's negligence or other fault.



This equipment includes parts and assemblies sensitive to damage from electrostatic discharge. Use caution to prevent damage during all service procedures.

Table 1 Mod Kit, No. 1, 9B8376 for the 3000 PROCESSOR includes:

Part No.	Description	Qty.
9B8662	"A" ROLLER - FIXER/WASH CROSSOVER	1
9B8449	Software Diskette, latest version	1
8B7489	Mod Instructions	1
1C0583	Mod Reimbursement Card	1

Table 2 Mod Kit, No. 3, 9B8377 for the 5000 PROCESSOR includes:

Part No.	Description	Qty.
9B8662	"A" ROLLER - FIXER/WASH CROSSOVER	1
9B8247	Software Diskette, latest version	1
8B7489	Mod Instructions	1
1C0583	Mod Reimbursement Card	1

Installing the New Software



Note


For more details on loading the new software, see the procedure for Downloading the Operating Software in the Adjustments and Replacements service publication.

1. Energize the PROCESSOR, and connect the PORTABLE COMPUTER.
2. Insert the DISKETTE from the Mod Kit into the A DRIVE of the PORTABLE COMPUTER.
3. At the C:> prompt, type **A:** and press [Enter] .
4. At the A:> prompt, type **DOWNLOAD** and press [Enter] .
5. While the new software is loading, install the new "A" ROLLER. See the procedure below.

Installing the New "A" ROLLER

1. Remove the existing "A" ROLLER from the FIXER/WASH CROSSOVER.
 - See Figure 1 for the 3000 RA PROCESSOR on Page 3.
 - See Figure 2 for the 5000 RA PROCESSOR on Page 4.
2. Install the new "A" ROLLER from the Mod Kit.

Figure 1 **3000 RA PROCESSOR**, Replacement of the “A” ROLLER — See Page 4 for the 5000 PROCESSOR

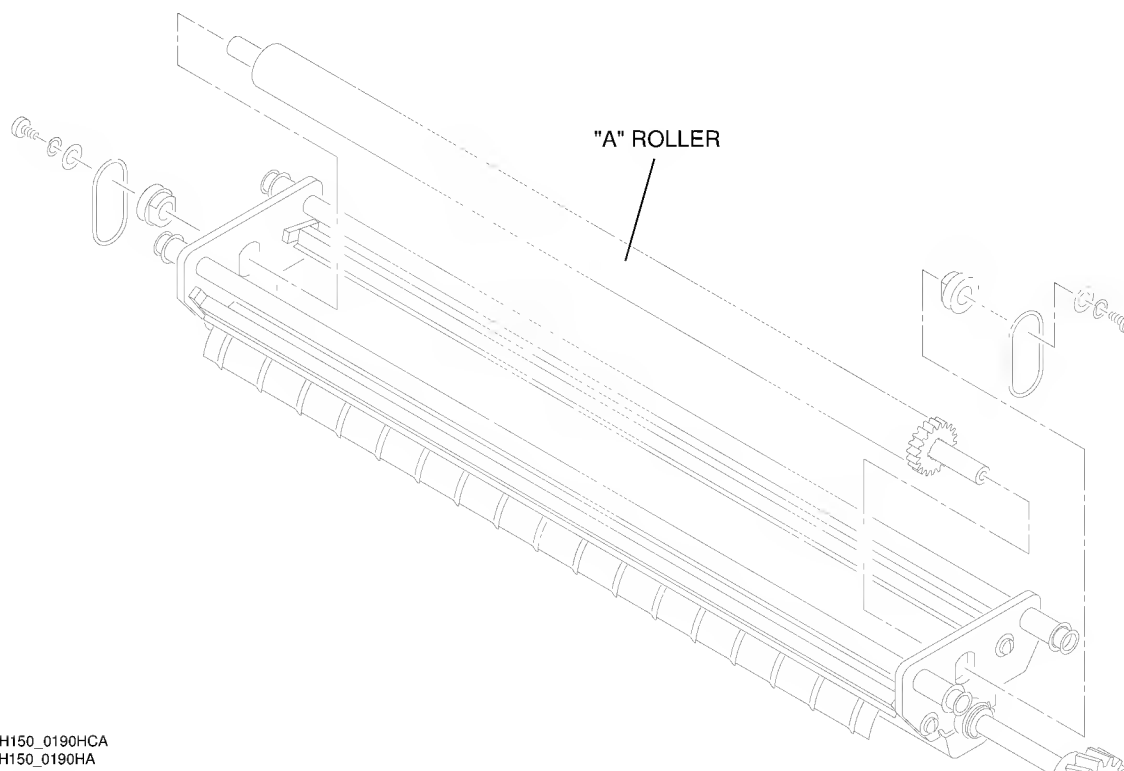


Note

ROLLER 9B8662 does not substitute for 467017 in all positions in the 3000 and 5000 PROCESSORS, only in the “A” position of the FIXER/WASH CROSSOVER.

3. Change the Part No. for the new “A” ROLLER in the Figures in the Parts List, and add the new Part No. to the Numerical and Alphabetical Indexes:

Old Part No.	New Part No.	Description	3000 RA Processor	5000 RA Processor
			Affected Pages	Affected Pages
467017	9B8662	“A” ROLLER - FIXER/WASH CROSSOVER <u>only</u>	2-5, 3-23, 9-4, and 10-7	2-3, 3-23, 9-4, and 10-6


4. Circle the “1” on the MODIFICATION LABEL of the 3000 PROCESSOR or the “3” on the 5000 PROCESSOR.
5. Check for the correct operation of the PROCESSOR.

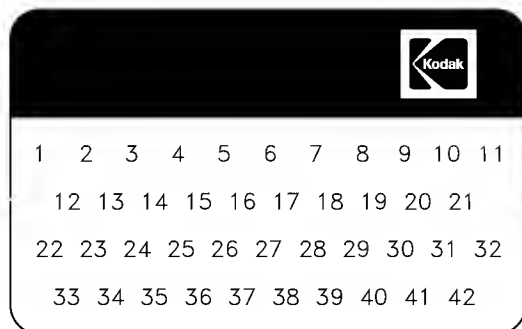

On the MODIFICATION LABEL:

**Circle the “1” (3000 PROCESSOR) or the
“3” (5000 PROCESSOR)**

Figure 2 **5000 RA PROCESSOR, Replacement of the “A” ROLLER**

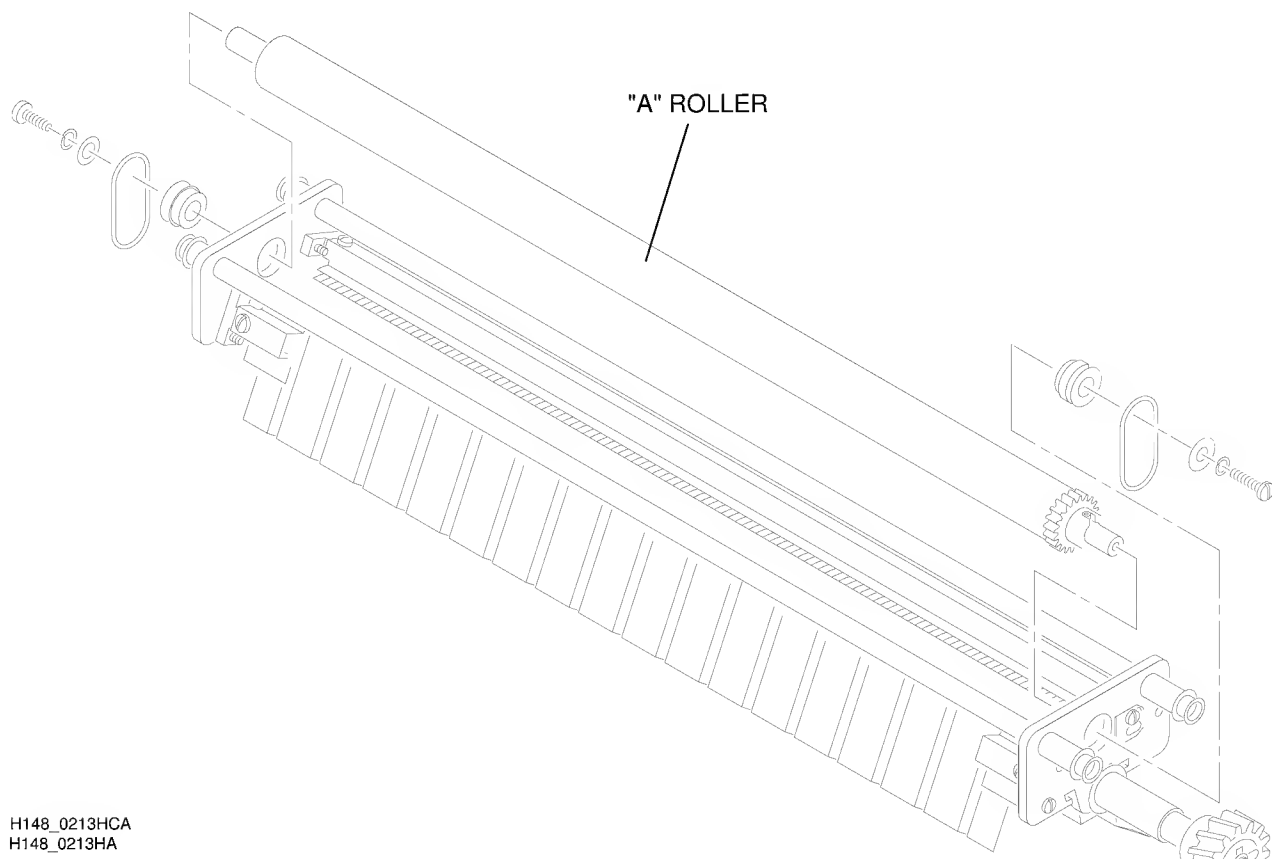

Print Date	Pub. No.	Affected Pages	File Name	Notes
01OCT96	9B8818	All	ma3425_3_01oct96.doc	New Modification Instructions.

Kodak and X-Omat are trademarks.

